

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

INPUT VOLTAGE

AC 120, 277V

FREQUENCY

60HZ

LETTER COLOR

(G) Green, (R) Red

IP RATING

IP20

OPERATING TEMPERATURE

0°C~+40°C

LIFE SPAN

50,000hrs

Product Showcase




Product Features

FEATURES

- Thin, low profile exit sign to meet any safety needs.
- Sturdy thermoplastic polymer construction, injection-molded, VO flame retardant, and high impact housing. Two "EXIT" Faceplates (with optional knockout arrows) and one blank faceplate included.
- Easy to install. Universal mounting canopy for top or side installation.
- NiCad Battery - Must connect the battery after installation.
- UL 924 compliant. Provides uninterrupted emergency operation for at least 90 minutes.
- Mounting canopy, installation instructions & hardware (inside unit)
- Listed for damp location.
- UL/cUL Listed



Dimensions

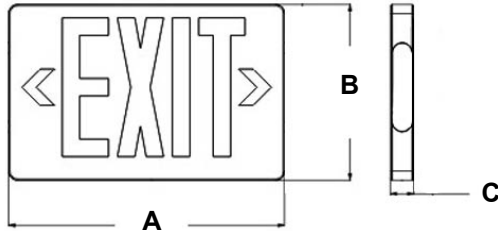

A

305mm
(12.01")

B

203mm
(7.99")

C

53mm
(2.09")

Ordering Information

ES - Color - WH EM

Series	"EXIT" Color	Finish	Input Voltage
ES	G - Green R - Red	WH - White	EM - 120-277V w/ 90 minutes emergency duration