

Client: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_ Qty: \_\_\_\_\_

## Technical Specifications

### INPUT VOLTAGE

AC 110~277V, 347V, 480V

### FREQUENCY

50~60HZ

### COLOR TEMPERATURE

4000K, 5000K

### COLOR RENDERING INDEX

75

### DISTRIBUTION

Type III, V Medium

### IP RATING

IP65

### OPERATING TEMPERATURE

-30°C~+55°C

### LIFE SPAN

75,000hrs

### DIMMING

0-10V



## Product Showcase

### FEATURES

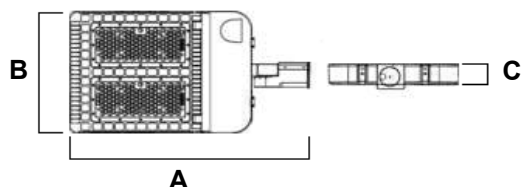
- Amazing versatility for illuminating all parking lots, walkways, and building areas in order to provide a greater feeling of security during any time of day.
- Simple and effective design that creates air convection flow around the body of the luminaire, which allows the heat-sink to effectively dissipate heat.
- 98% efficient optics available for Type III & V distributions.
- Option for "Assembled in America" upon request.
- IP65 Rated suitable for outdoor / wet applications.
- ETL / cETL Listed, DLC Listed.

Option Available upon Request:



## Product Features

## Dimensions



Power	A	B	C	EPA
60W - 150W	651.8mm (25.67")	305.2mm (12.00")	69.2mm (2.72")	1.97ft²
200W - 400W	765.8mm (31.10")	413.2mm (16.26")	70.3mm (2.77")	3.38ft²

## Ordering Information

P3 -  Wattage -  CCT -  Distribution -  Mounting -  DB  Input Voltage

Series	Wattage	CCT	Distribution	Mounting	Finish*	Input Voltage & Dimming
P3	60 - 60W (7200lm) 100 - 100W (12500lm) 150 - 150W (18000lm) 200 - 200W (24000lm) 300 - 300W (36000lm) 400 - 400W (47000lm)	50 - 5000K 40 - 4000K	3M - Type III Medium 5M - Type V Medium	SF - Slipfitter SL - Square Pole-L SS - Square Pole-S RL - Round Pole-L RS - Round Pole-S WM - Wall Mount	DB - Dark Bronze	UD - 110-277V & 0-10V Dimming* H - 347V, 480V

**Non-Adjustable\*\***  
Dark Sky Compliant

NSL - Non-Adjustable  
Square Pole-L  
NRL - Non-Adjustable  
Round Pole-L

Specifications are subject to change without notice.

\* Custom Finish available, consult factory.

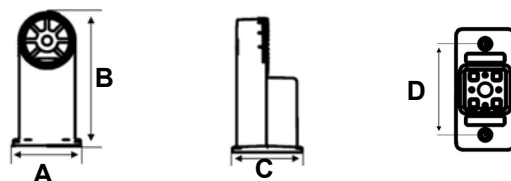
\*\* Non-adjustable available, consult factory.

www.alslighting.us - TEL: (909) 598-7788 - FAX: (909) 598-9388 - info@alslighting.us







© 2020 Advantage Lighting Solutions - All Rights Reserved

Rev: 120919



## MOUNTING OPTIONS







### Mounting Options

	Part #	Description	A	B	C	D
	- SF Slipfitter	Suitable for 2-3/8" OD pipe	96.89mm (3-7/8")	176mm (6-7/8")	88mm (3-1/2")	N/A
	- SL Square Pole	Suitable for square pole 4" or larger	140mm (5-1/2")	181.07mm (7-1/8")	95mm (3-3/4")	109mm (4-5/16")
	- SS Square Pole	Suitable for square pole 4" or smaller	90mm (3-9/16")	179mm (7")	92.53mm (3-5/8")	52mm (2-1/16")
	- RL Round Pole	Suitable for round pole 4" or larger	140mm (5-1/2")	205.60mm (8-1/8")	95mm (3-3/4")	109mm (4-5/16")
	- RS Round Pole	Suitable for round pole 4" or smaller	90mm (3-9/16")	200.21mm (7-7/8")	92.54mm (3-5/8")	52mm (2-1/16")
	- WM Wall Mount	Suitable for exterior wall mount or metal cross	90mm (3-9/16")	119.06mm (3-7/8")	122.51mm (4-7/8")	90mm (3-9/16")

### Optic Lens

	Part #	Description
	LENS-P3-3	Type III Distribution lens Note: P3 Uses (2) lenses
	LENS-P3-5	Type V Distribution lens Note: P3 Uses (2) lenses

### Control Option

	Part #	Description
	SENSOR-PH-PT-U/H Photocell	Twist lock Photocell Photocell control, blue cap, factory installed
	SENSOR-211 Motion Sensor	Integral Motion/Photocell Sensor (Wattstopper FSP-211) IR Capable, 110-277V
	SENSOR-221B Motion Sensor	Integral Motion/Photocell Sensor (Wattstopper FSP-211) IR Capable, 480V
	SENSOR-FSIR100 Wireless Commissioning Tool	Wattstopper Wireless Control for FSP-211 PIR Motion Sensor

## Accessories/Option Adder

Part #	Description
Assembled in America*	Fixtures to be assembled to "Assembled in America" standard upon request.

Rev: 120919