

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

- INPUT VOLTAGE**
AC 120~277V
- FREQUENCY**
60HZ
- LETTER COLOR**
(G) Green, (R) Red
- IP RATING**
IP20
- OPERATING TEMPERATURE**
0°C~+40°C
- LIFE SPAN**
50,000hrs



Product Showcase


FEATURES

- Thin, low profile exit sign to meet any safety needs.
- Sturdy thermoplastic polymer construction, injection-molded, VO flame retardant, and high impact housing. Two "EXIT" Faceplates (with optional knockout arrows) and one blank faceplate included.
- Easy to install. Universal mounting canopy for top or side installation.
- NiCad Battery - Must connect the battery after installation.
- UL 924 compliant. Provides uninterrupted emergency operation for at least 90 minutes.
- Mounting canopy, installation instructions & hardware (inside unit)
- Listed for damp location.
- UL/cUL Listed



Product Features

Dimensions

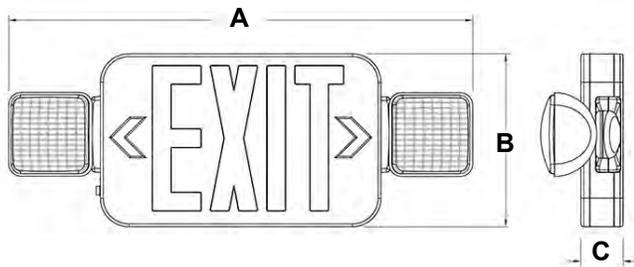

A	B	C
550mm (21.65")	203mm (7.99")	100mm (3.94")

Ordering Information

ES - - COMBO - WH EM

Series	"EXIT" Color	COMBO	Finish	Input Voltage
ES	G - Green R - Red	COMBO - with emergency lights (100lm)	WH - White	EM - 120-277V w/ 90 minutes emergency duration