

Client: _____ Project: _____ Type: _____ Qty: _____

Technical Specifications

INPUT VOLTAGE

AC 110~277V

FREQUENCY

50~60HZ

COLOR TEMPERATURE

4000K, 5000K

COLOR RENDERING INDEX

75

DISTRIBUTION

Clear Prismatic Lens

IP RATING

IP65

OPERATING TEMPERATURE

-40°C~+40°C

LIFE SPAN

50,000hrs

DIMMING

0-10V



Product Showcase


FEATURES

- Equivalent to 75W - 275W MH lamps.
- Die cast ADC12 aluminum for excellent thermal management and durability.
- Factory pre-treated and powder-coated to meet the most rugged industry standards.
- Heat-resistant polycarbonate lens.
- Built-in surge protection up to 4kV.
- IP65 Rated suitable for wet applications.
- UL/cUL Listed, DLC Listed.



Product Features

Dimensions

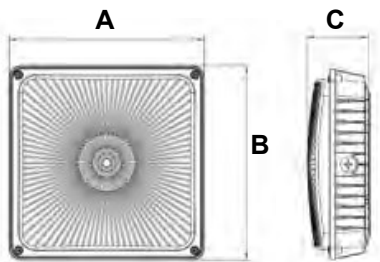

A	B	C
243mm (9.57")	243mm (9.57")	77.93mm (3.07")

Ordering Information

CP - Wattage CCT PL - JM Finish Input Voltage

Series	Wattage	CCT	Distribution	Mounting	Finish	Input Voltage & Dimming
CP	27 - 27W (3750lm) 40 - 40W (5400lm) 60 - 60W (8000lm)	50 - 5000K 40 - 4000K	PL - Prismatic Lens	JM - Surface Mount 3/4" threaded pipe connector	DB - Dark Bronze WH - White	U - 110-277V UD - 110-277V & 0-10V Dimming*

Accessories/Option Adder

Part #	Description
EMB-8W	Integral Emergency Battery (8W) (EMB will be External on the CP-60)
SENSOR-PH-PB-U	Button Photocell 110-277V
SENSOR-112	End Mount Motion Sensor 110-277V (Damp Location)
SURGE-LSP4-U	110-277V 10kV Surge Protector

CP**SERIES****LED CANOPY LIGHT****ALS**
Advantage Lighting Solutions

DLC Listing

Part Number	OEM Part Number	DLC Classification
CP - 27 40 - XX U D	CP-2740-DBUD	Premium
CP - 27 50 - XX U D	CP-2750-DBUD	Premium
CP - 40 40 - XX U D	CP-4040-DBUD	Premium
CP - 40 50 - XX U D	CP-4050-DBUD	Premium
CP - 60 40 - XX U D	CP-6040-DBUD	Premium
CP - 60 50 - XX U D	CP-6050-DBUD	Premium